

Domino V230i Information Editing Guide


Introduction

This guide provides a step-by-step walkthrough for editing information on the Domino V230i TTo machine. Learn how to navigate the main menu, create new information, add text and variables, adjust fonts, and incorporate barcodes or QR codes. Perfect for beginners and professionals, this guide ensures efficient information editing for your printing needs. Watch the tutorial video: <https://www.youtube.com/watch?v=opLbJrmPNn4>

Main Menu Navigation

Start from the Domino V230i main interface to access the ****Information**** section:

1. Locate and click the ****Information**** button on the main menu.
2. Enter the information editing interface, where you'll see the ****New**** option.
3. Click ****New**** to create a new information entry.

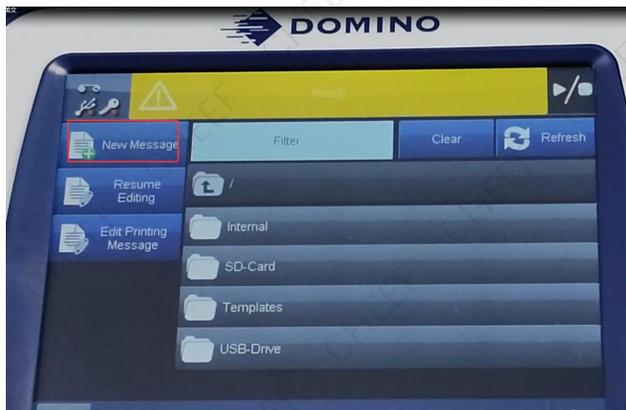

Adding Fixed Text

Add static text to your information:

1. Click the ****Plus Key**** and select ****Text****.
2. Enter your desired text, such as a product name or description.
3. Click ****OK**** to save the text.





Suzhou Cheef Technology CO.,LTD

****Adding Variables (Clock)****

The Domino V230i allows dynamic variables like time or counters:


1. Click the ****Plus Key****, select ****Variable****, then click ****New****.
2. Choose ****Clock**** from the variable options.
3. Select the default time format or customize as needed.
4. Click ****OK**** to add the time variable.

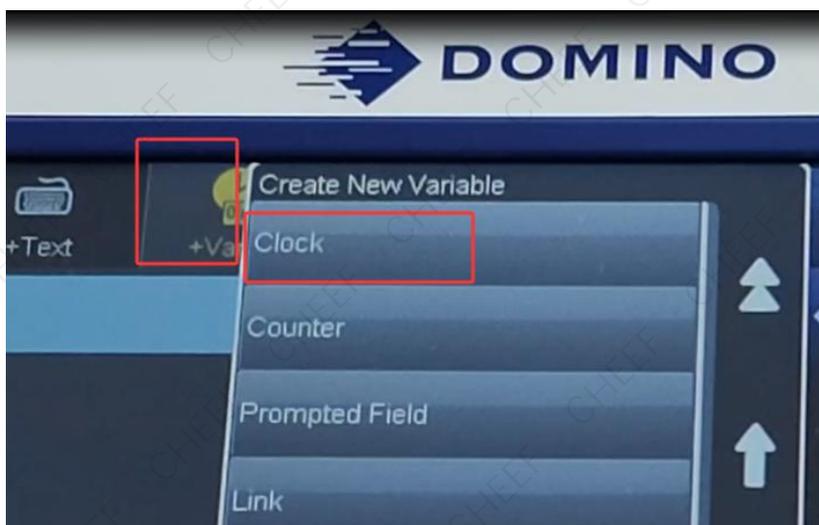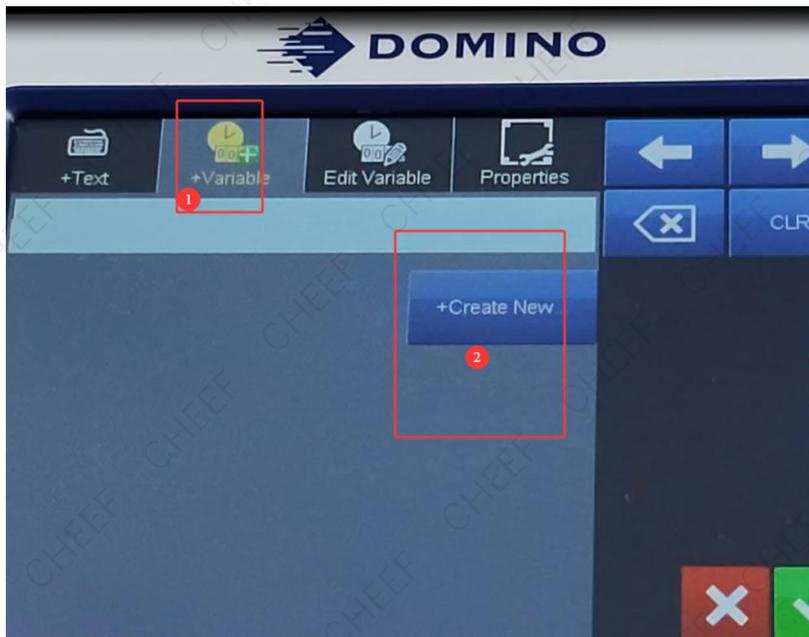

****Adjusting Font and Size****

Customize the appearance of your text or variables:


1. Select the text or variable and adjust the ****Font Size**** (default is 12).
2. Change the size to 20 or your preferred value.
3. Choose a font style from the ****Font**** options.
4. Apply ****Bold****, ****Italic****, or ****Underline**** for emphasis.

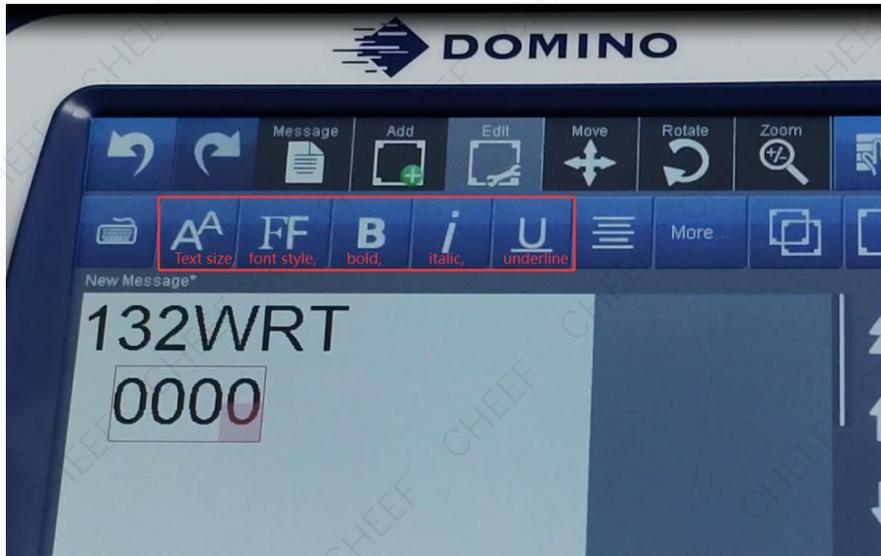

****Deleting Fields****

Remove unwanted fields easily:

1. Select the text or variable to delete.
2. Click the ****Delete**** button and confirm to remove it.

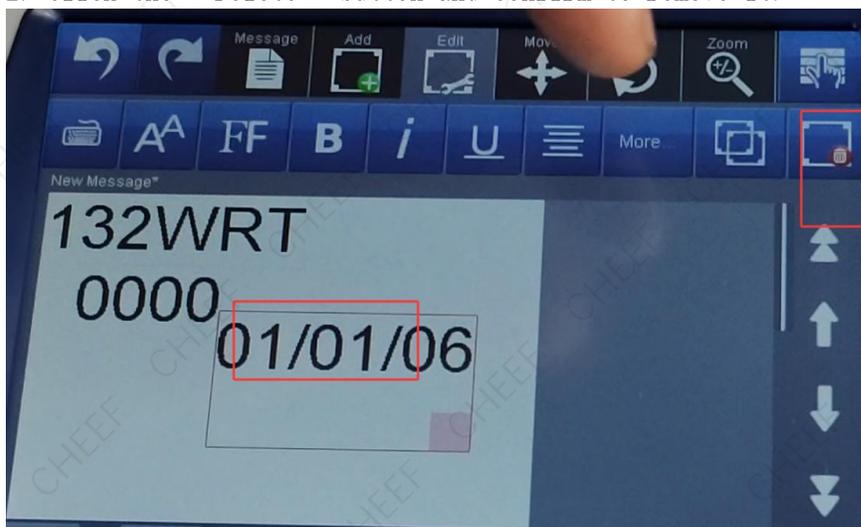


Suzhou Cheef Technology CO.,LTD

****Adding a Counter****

Counters are ideal for dynamic numbering:


1. Click the ****Plus Key****, select ****Variable****, then click ****New****.
2. Choose ****Counter**** and use GenixAI the default settings or customize as needed.
3. Click ****OK**** to add the counter.

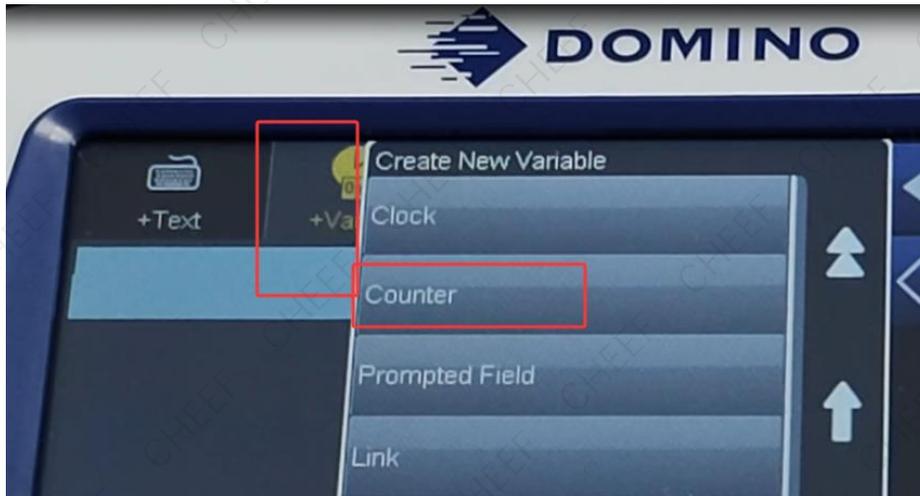

****Adding Barcodes and QR Codes****

Create barcodes or QR codes for your information:

1. Click the ****Plus Key**** and select ****Barcode**** or ****QR Code****.
2. Choose the code type (e.g., QR Code or 128 Code).
3. Enter the content for the code, such as a product serial number.
4. Click ****OK**** to save.
5. To adjust size, click ****More Information**** and modify the ****Pixel Size**** (default is 6, can be reduced).
6. For barcodes, adjust the ****Height**** as needed.

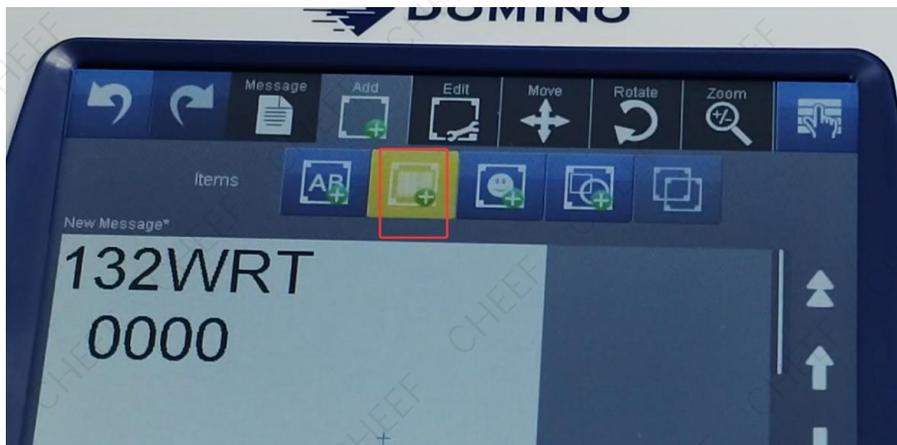

****Moving and Rotating Content****

Optimize the layout for printing:


1. Select text, variables, or codes and use ****Up****, ****Down****, ****Left****, or ****Right**** to reposition.
2. Use the ****Rotate**** function to adjust orientation.



****Saving Information****

Save your edited information:


1. Click the ****Save**** button.
2. Enter a name (e.g., "Information 2").
3. If the name exists, choose to ****Overwrite**** or rename and save.

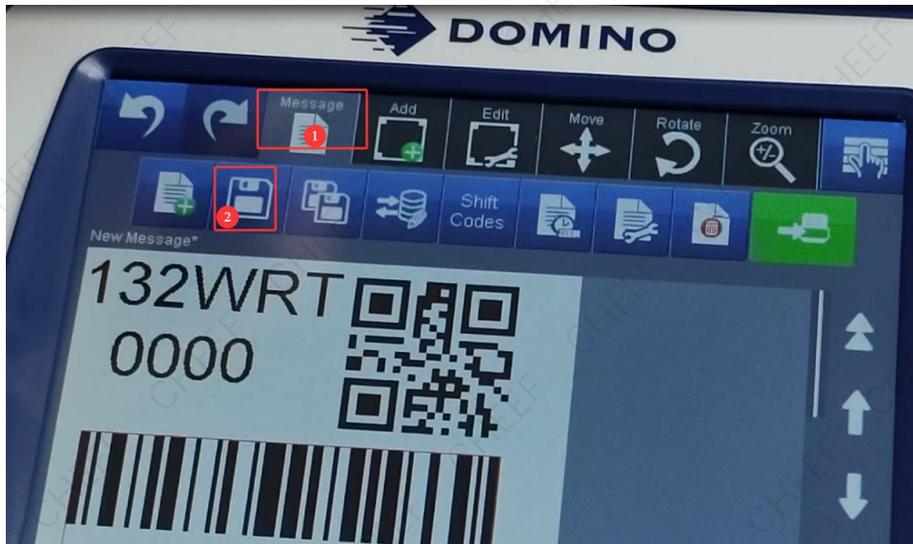

****Printing Information****

Preview and print your information:

1. In the information editing interface, click ****Print****.
2. Verify the print output meets your expectations.

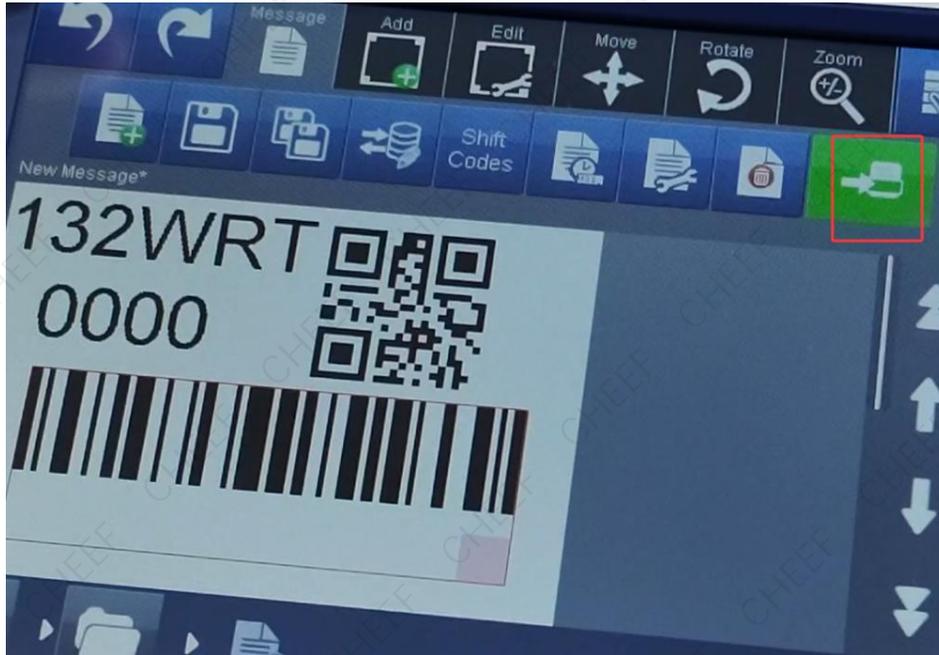

****Contact Us****

For further assistance or technical support, contact Cheef:

- Email: sales@cheef.cn
- WhatsApp: +86 181 6857 5767

****Keywords****: Domino V230i, information editing, TTo machine, barcode printing, QR code creation, text editing, variable addition, counter setup, font adjustment, printing operations